RoHS COMPLIANT

1 OF 1

REV.	REVISION	DATE

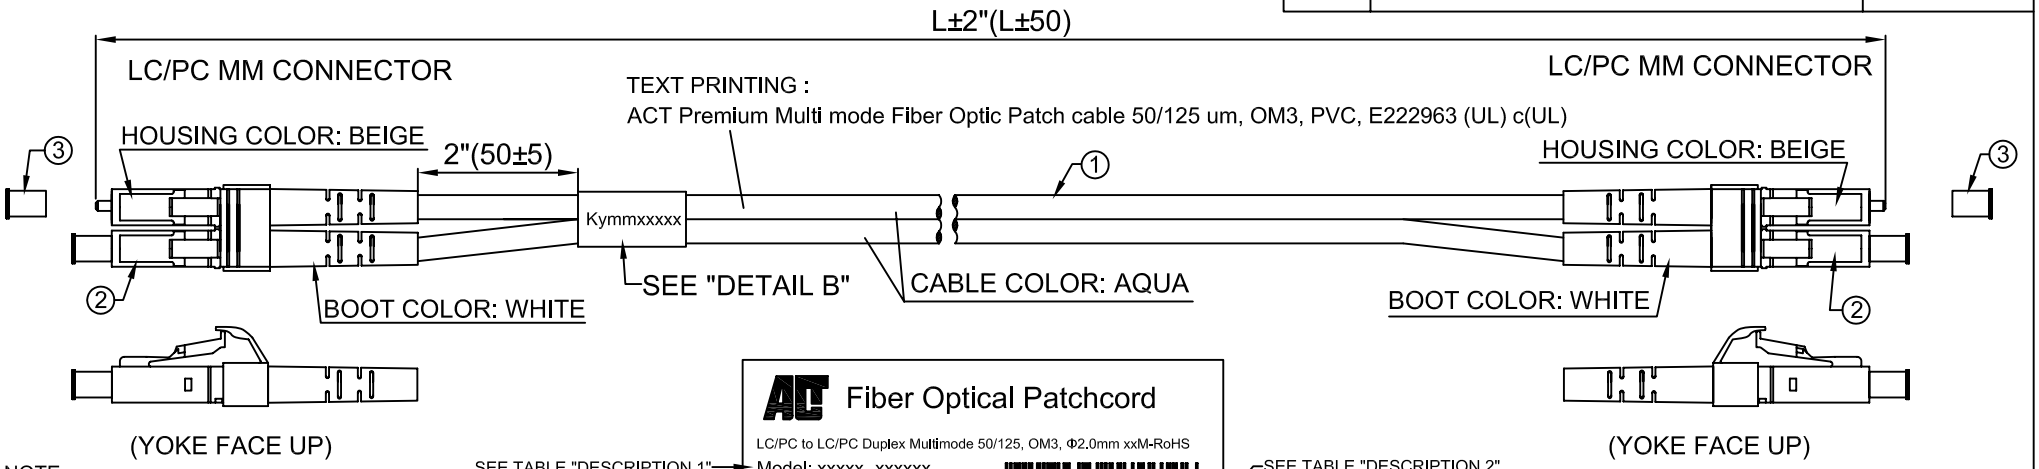

NOTE:
1. INSERTION LOSS < 0.3dB.
2. OPERATION TEMP: -25℃ TO +80℃, 5 CYCLES.
3. DURABILITY: 500 CYCLES.
4. VIBRATION: 10 TO 55 Hz 1.5mm DOUBLE AMPLITUDE.
5. TENSILE LCRENGH: 10Kg.
6. PACKING:

ROUND CABLE METHOD SEE "DETAIL A"			
	BAG TYPE	QTY	LABEL
SMALL	POLYBAG	1 CABLE WITH TELC CARD	SEE "DETAIL C"
MEDIUM	POLYBAG	5 CABLES	NONE
LARGE	POLYBAG	ALL	NONE
EACH LARGE POLYBAG IN AN OUTER CARTON			

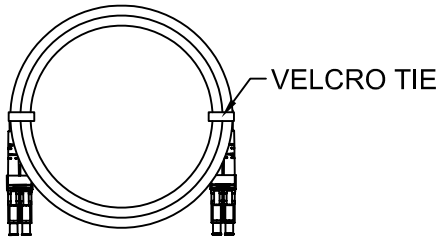

DETAIL A

SEE TABLE "DESCRIPTION 1"

Fiber Optical Patchcord

LC/PC to LC/PC Duplex Multimode 50/125, OM3, Φ2.0mm xxM-RoHS

Model: xxxxx -xxxxxx

Lot number:

PO/NO.

SEE TABLE "DESCRIPTION 2"

Performance: (@23℃) λ=850/1310±20nm

Serial No		Insertion Loss ≤ 0.3dB	
		850nm	1310nm
Kymmxxxxx	A		
	B		
	C		
	D		

Prepared By: _____ Date: _____

DETAIL C



DETAIL B
y: Year; mm: Month
xxxxx: Serial Number

PART NO.	**	xx	L	DESCRIPTION 1	DESCRIPTION 2
RL9650	50	50	164'(50000)	994250-RL9650	8716065229455
RL9630	30	30	98.4'(30000)	994230-RL9630	8716065229448
RL9625	25	25	82'(25000)	994225-RL9625	8716065229431
RL9620	20	20	65.6'(20000)	994220-RL9620	8716065229424
RL9615	15	15	49.2'(15000)	994215-RL9615	8716065229417
RL9610	10	10	32.8'(10000)	994210-RL9610	8716065229400
RL9605	05	5	16.4'(5000)	994205-RL9605	8716065229394
RL9603	03	3	9.84'(3000)	994203-RL9603	8716065229387
RL9602	02	2	6.56'(2000)	994202-RL9602	8716065229370
RL9651	51	1.5	4.92'(1500)	9942015-RL9651	8716065229363
RL9601	01	1	3.28'(1000)	994201-RL9601	8716065229356

CULCOMER APPROVAL: DATE:

ITEM	Q'TY	PART NO.	DESCRIPTION
3	4PCS		LC DUST COVER, WHITE.
2	4SETS		CONNECTOR: LC/PC MM BEIGE HOUSING WITH WHITE BOOT.
1	1PC		CABLE: MULTIMODE, 50/125um, 2.0mm ZIPCORD, OFNR, AQUA JACKET.

PART LIST

UNIT: Inches[mm]		TITLE: PATCHCORD LC-LC MULTIMODE DUPLEX 50/125, OM3, 2.0mm, AQUA	
DRAWN BY: Catherine	DATE: 2008/3/3	CULCOMER	CULCOMER PART NO.: RL96**
CHECKED BY	DATE		
APPROVED BY	DATE	DRAWING NO.: PK802003	Ref. NO. / REV.: A
SALE BY	DATE	TRENDEX PART NO.	